



Decidedly different: Cordless drills by Festool.

FESTOOL

Drilling and screwdriving 01

Application overview | 13

Machine overview | 14

Cordless drills | 16

CXS, C 12 Li, C 15 Li, T 12+3, T 15+3, T 18+3

System overview and accessories | 23

Screwdriver and drill bits | 24

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

Can a cordless drill get any better than this? Yes, it can. Because Festool always thinks one step ahead and this is why the CXS, C and T+3 series are packed full of so many ideas: EC-TEC motor, CENTROTEC, attachments for special applications, modern lithium-ion battery technology and a handy, lightweight design. For exceptional solutions that meet your requirements and help you tackle your daily challenges.

Drilling and screwdriving

Three tools, one philosophy: Maximum handling comfort.



The C 12: Work comfortably in any position.

A cordless drill has basic functions. It should make work easier, accelerate the process and should have as long a useful life as possible. Whoever develops tools strictly according to these standards, quickly reaches limits – or discovers the opportunities behind them.

With results that make Festool cordless drills unique – such as the CENTROTEC quick-change system, the FastFix adapters and the EC-TEC drive concept. In the case of each of these developments the focus is on the workman's desires – for an ergonomic design, low weight and intuitive operation of the tools. That's why

we have expanded our development and testing laboratories with an informative and instructive addition: our customer workshop. Here we receive valuable knowledge – also through relentless criticism. And the drive to construct special tools: Cordless drills – Made in Germany – Made by Festool.



The T 18+3 screwdriver: the power package. The right tool for the job when the going gets tough.



The CXS: strong performance, compact design.

FESTOOL The system



At Festool, we do not only think in terms of tools, but also in terms of systems so that you can work more quickly, easily and efficiently.



The CENTROTEC system.

CENTROTEC – change between drill, countersink and screwdriver bits in seconds.

CENTROTEC from page 24



Screwdriver, drill bit system.

CENTROTEC and Novadrive: all compatible.

Screwdriver and drill bits from page 24

Application overview – Drilling and screwdriving

						
	CX5	C 12 Li	C 15 Li	T 12+3	T 15+3	T 18+3
Carpentry, joining, timber construction						
Kitchen fitting and furniture assembly	●	●	○	●	○	○
Attaching fittings, installing locks	●	●	○	●	○	○
Holes for dowels and fittings, up to 35 mm	○	●	●	●	●	●
Wooden terraces	○	○	●	○	●	●
Fitting rails and profiled strips	●	●	○	●	○	○
Frequent overhead work	●	●	○	●	○	○
Fences, pergolas, carports, canopies	○	○	●	○	●	●
Interior fitting, dry walling, trade fair construction						
Securing floor and ceiling members	●	●	○	●	○	○
Studwork for floors/walls/roofs	○	●	●	●	●	●
Installing plasterboard	○	● ¹⁾	○	○	○	○
Using hole cutters	○	○	●	○	●	●
Installing partition walls	○	●	●	●	●	●
Painters, interior decorators, floor layers						
Securing floorboards	○	●	●	●	●	●
Fitting curtain rails and skirting boards	●	●	○	●	○	○
Stirring paint and varnish	○	●	○	●	○	○
Installing and removing fittings	●	●	○	●	○	○
Fitting roller shutters and blinds	●	●	●	●	●	●
Applications in other industries						
Removing vehicle parts	●	●	○	●	○	○
Electrical installations	●	●	○	●	○	○
Vehicle interior fitting (mobile homes, caravans, boats)	●	●	○	●	○	○
Metal construction	○	●	●	●	●	●

¹⁾ Ideal with the FastFix depth stop DD-DC

For polishing applications, see "Polishing" chapter, page 253

○ Appropriate ○ Very appropriate ● Extremely appropriate



The FastFix system.

Several tools in one: with FastFix attachments, the T 12+3, T 15+3, T18+3 and C 12, C 15 are well equipped for most applications.

FastFix attachments on page 23



The battery system.

High-performance batteries – from compact 1.5 Ah batteries all the way up to long-lasting 18 V battery packs.

Battery packs on page 23



The battery charging system.

So that there will be no downtime, the quick charger makes the batteries ready to use again in no time at all, and also does it in a way that protects them.

Chargers on page 22

Drilling and screwdriving

Machine overview

Cordless drill CXS



Strengths and benefits

- Impressive ergonomics and low weight (0.9 kg) for convenient drilling and fastening
- The compact, handy shape makes work easier, even in cramped spaces
- FastFix interface and CENTROTEC quick tool-change system
- 12 torque settings and torque switch-off for precision fastening
- Latest Lithium-ion battery technology for the longest sustained usage

Next page 16

Technical data	
Battery voltage	10,8 V
Idling speed, 1st gear/2nd gear	0-400/0-1200 min ⁻¹
Drilling diameter, wood/steel	12/8 mm
Torque adjustment	0,2-2,4 Nm
Max. torque, wood/steel	10/16 Nm
Chuck range	1-8 mm
Li-Ion battery capacity	1,5 Ah
Charging time Li Ion	20 min
Weight with Li Ion	0,9 kg

■ = with electronics



Cordless drill C 12 Li



Strengths and benefits

- Impressive ergonomics: compact, lightweight and perfectly balanced
- Brushless EC-TEC motor with integrated motor management for long service life and the highest output
- FastFix interface for all FastFix attachments and CENTROTEC rapid tool-change system
- Fully electronic torque setting and switch-off for precise screwdriving
- Latest Lithium-ion battery technology for the longest sustained usage

Next page 18

Technical data	
Battery voltage	10,8 V
Idling speed, 1st gear/2nd gear	0-450/0-1500 min ⁻¹
Drilling diameter, wood/steel	25/14 mm
Torque adjustment	0,5-8/0,5-6 Nm
Max. torque, wood/steel	20/34 Nm
Chuck range	1,5-13 mm
Li-Ion battery capacity	1,5 Ah
Charging time Li Ion	20 min
Weight with Li Ion	1,3 kg

■ = with electronics



Cordless drill C 15 Li



Strengths and benefits

- Impressive ergonomics: compact, lightweight and perfectly balanced
- Brushless EC-TEC motor with integrated motor management for long service life and the highest output
- FastFix interface for all FastFix attachments and CENTROTEC rapid tool-change system
- Fully electronic torque setting and switch-off for precise screwdriving
- Latest Lithium-ion battery technology for the longest sustained usage

Next page 18

Technical data	
Battery voltage	14,4 V
Idling speed, 1st gear/2nd gear	0-450/0-1500 min ⁻¹
Drilling diameter, wood/steel	35/16 mm
Torque adjustment	0,5-8/0,5-6 Nm
Max. torque, wood/steel	25/40 Nm
Chuck range	1,5-13 mm
Li-Ion battery capacity	3,0 Ah
Charging time Li Ion	45 min
Weight with Li Ion	1,6 kg

■ = with electronics



Cordless drill T 12+3



Strengths and benefits

- Impressive ergonomics: compact, lightweight and perfectly balanced
- Brushless EC-TEC motor with integrated motor management for long service life and the highest output
- FastFix interface for all FastFix attachments and CENTROTEC rapid tool-change system
- Fully electronic torque setting and switch-off for precise screwdriving
- Latest Lithium-ion battery technology for the longest sustained usage

Next page 20

Technical data	
Battery voltage	10,8 V
Idling speed, 1st gear/2nd gear	0-450/0-1500 min ⁻¹
Drilling diameter, wood/steel	25/14 mm
Torque adjustment	0,5-8/0,5-6 Nm
Max. torque, wood/steel	20/34 Nm
Chuck range	1,5-13 mm
Li-Ion battery capacity	3,0 Ah
Charging time Li Ion	45 min
Weight with Li Ion	1,4 kg

■ = with electronics



Cordless drill T 15+3



Strengths and benefits

- Impressive ergonomics: compact, lightweight and perfectly balanced
- Brushless EC-TEC motor with integrated motor management for long service life and the highest output
- FastFix interface for all FastFix attachments and CENTROTEC rapid tool-change system
- Fully electronic torque setting and switch-off for precise screwdriving
- Latest Lithium-ion battery technology for the longest sustained usage

Next page 20

Technical data	
Battery voltage	14,4 V
Idling speed, 1st gear/2nd gear	0-450/0-1500 min ⁻¹
Drilling diameter, wood/steel	35/16 mm
Torque adjustment	0,5-8/0,5-6 Nm
Max. torque, wood/steel	27/40 Nm
Chuck range	1,5-13 mm
Li-Ion battery capacity	3,0 Ah
Charging time Li Ion	45 min
Weight with Li Ion	1,5 kg

■ = with electronics



Cordless drill T 18+3



Strengths and benefits

- Impressive ergonomics: compact, lightweight and perfectly balanced
- Brushless EC-TEC motor with integrated motor management for long service life and the highest output
- FastFix interface for all FastFix attachments and CENTROTEC rapid tool-change system
- Fully electronic torque setting and switch-off for precise screwdriving
- Latest Lithium-ion battery technology for the longest sustained usage

Next page 20

Technical data	
Battery voltage	18 V
Idling speed, 1st gear/2nd gear	0-450/0-1500 min ⁻¹
Drilling diameter, wood/steel	45/16 mm
Torque adjustment	0,5-8/0,5-6 Nm
Max. torque, wood/steel	30/45 Nm
Chuck range	1,5-13 mm
Li-Ion battery capacity	3,0 Ah
Charging time Li Ion	45 min
Weight with Li Ion	1,7 kg

■ = with electronics



- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17

Drilling and screwdriving

Cordless drill CXS

When it comes to performance, size really isn't that important.

The CXS compact cordless drill possesses a remarkable torque that is also very effective in places that are hard to access. With its extremely short design and balanced weight distribution, it also simplifies overhead work and work in narrow areas.



<p>CENTROTEC tool chuck. Quick change between applications using the CENTROTEC quick-change system. All bits can also be used in the direct holder.</p>	
<p>Optimum power performance. The CXS can overcome any challenge with 10.8 volts. 12 available torque settings for controlled power.</p>	
<p>Elbow adapter. Work around corners and even reach concealed screws with the elbow adapter. Ideal for working in tight spaces.</p>	
<p>Belt clip. Not only always at your fingertips: your hands are also free at the right moment: the belt clip can be positioned for right- and left-handers.</p>	
<p>Optimum illumination. The integrated LED light permits precise work even in dark corners.</p>	

Scope of delivery	Order no.
CENTROTEC tool chuck, CENTROTEC bit holder, battery pack BP-XS	
CXS Li 1,5 Set charger MXC, elbow adapter CXS, FastFix keyless chuck 8 mm, bit PZ 2, spare battery pack BP-XS, in a SYSTAINER SYS 1 T-LOC	564271
CXS Li 1,5 Plus charger MXC, FastFix keyless chuck 8 mm, bit PZ 2, in a SYSTAINER SYS 1 T-LOC	564252
CXS Li 1,5/GG spare battery pack and charger not included, in a carton	564351

Accessories see page 23

Mini dimensions. Maximum performance.



Sophisticated accessories.

The elbow adapter is perfect for work around corners and reaching concealed screws at tight angles. The standard chuck is always included in the scope of delivery – for all tools with a cylindrical shaft.



Practical bit store.

Easy access: four bits neatly stored close at hand in the bit holder.



Lithium-ion battery packs.

The CXS is powered by lithium-ion battery packs. They are especially light and efficient, never discharge by themselves – and can be recharged at any time. Completely without any memory effect.



Ergonomically perfected.

The CXS is particularly light and manageable. Perfectly balanced and weighing just 900 grams, this tool allows fatigue-free work in all situations.



Versatile and flexible.

The CENTROTEC quick-change system replaces chuck and bit holder and speeds up the change between drilling, countersinking and screwdriving. Different adapters for diverse applications.

Technical data

Battery voltage	10,8 V
Idling speed, 1st gear/2nd gear	0-400/0-1200 min ⁻¹
Drilling diameter, wood/steel	12/8 mm
Torque adjustment	0,2-2,4 Nm
Max. torque, wood/steel	10/16 Nm
Chuck range	1-8 mm
Li-Ion battery capacity	1,5 Ah
Charging time Li Ion	20 min
Weight with Li Ion	0,9 kg

■ = with electronics

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

Drilling and screwdriving

C 12 Li and C 15 Li cordless drills

The perfect shape.

Having won many awards for outstanding design, our cordless drills are now available with a completely new drive concept. The combination of lithium ion battery packs and EC-TEC motor make the C12 Li / C15 Li even more lightweight, durable and powerful – the C series has reached new heights.



Ergonomically perfected.

The light, compact design, the slender Softgrip handle and the perfectly located centre of gravity ensure that work goes easily and smoothly.



As much power as necessary but as little energy as possible.

EC-TEC only generates the exact amount of energy required for the actual application. The motor offers a variable speed range for tasks ranging from the powerful insertion of large screws to drilling at a speed of up to 1500 rpm.



CENTROTEC tool chuck.

The FastFix interface is the key to the CENTROTEC quick-change system and all FastFix adapters. All other types of tools can be used with the standard chuck.



Here everything has been considered.

Capacity display and belt clip are practical details: the hands are kept free for flexible work and with the capacity display the battery charge status can be checked at any time.



Optimum illumination.

The integrated LED light permits precise work even in dark corners.



Scope of delivery	Order no.
FastFix keyless chuck 13 mm	
C 12 Li 1,5 Set charger TRC 3, CENTROTEC tool chuck, wood drill bit D4 CENTROTEC, CENTROTEC bit holder, bit PZ 2, FastFix angle attachment, FastFix eccentric attachment, spare compact battery pack Li-Ion 1.5 Ah, in a SYSTAINER SYS 1 T-LOC	564363
C 12 Li 1,5 Plus charger TRC 3, CENTROTEC tool chuck, wood drill bit D4 CENTROTEC, CENTROTEC bit holder, bit PZ 2, spare compact battery pack Li-Ion 1.5 Ah, in a SYSTAINER SYS 1 T-LOC	564359
C 12 Li 1,5/GG compact battery pack Li-Ion 1.5 Ah, spare battery pack and charger not included, in a carton	564398
C 15 Li 3,0 Set charger TRC 3, CENTROTEC tool chuck, wood drill bit D4 CENTROTEC, CENTROTEC bit holder, bit PZ 2, FastFix angle attachment, FastFix eccentric attachment, spare battery pack Li-Ion 3.0 Ah, in a SYSTAINER SYS 1 T-LOC	564371
C 15 Li 3,0 Plus charger TRC 3, CENTROTEC tool chuck, wood drill bit D4 CENTROTEC, CENTROTEC bit holder, bit PZ 2, spare battery pack Li-Ion 3.0 Ah, in a SYSTAINER SYS 1 T-LOC	564367
C 15 Li 3,0/GG battery pack Li-Ion 3.0 Ah, spare battery pack and charger not included, in a carton	564400

Accessories see page 23

C 12 Li and C 15 Li – Handy, powerful and durable.



As versatile as your work.

You can work quickly and comfortably on a wide variety of applications using the C 12 Li/C 15 Li. For example, dry lining, installing windows, outdoor installation, interior vehicle fitting and many more.



Practical bit store.

Easy access: four bits neatly stored close at hand in the bit holder.



Controlled power.

The finely-tuned EC-TEC motor and the patented compact gear mechanism enable you to insert both large and small screws with minimum effort and without overtightening or damaging the screw heads.



Work comfortably in any position.

Because of its ergonomic shape, the C 12 Li/ C 15 Li rests particularly snugly in your hand and is perfectly balanced in any position. This conserves your energy, whether you are working on the floor, the wall or the ceiling.



Remarkably modest.

The EC-TEC drive from Festool represents exceptional power performance using the lowest amount of energy across the entire speed range. Here the EC-TEC motor runs without carbon brushes, and is therefore wear-free, maintenance-free and extremely sturdy.

Technical data C 12 Li	
Battery voltage	10,8 V
Idling speed, 1st gear/2nd gear	0-450/0-1500 min ⁻¹
Drilling diameter, wood/steel	25/14 mm
Torque adjustment	0,5-8/0,5-6 Nm
Max. torque, wood/steel	20/34 Nm
Chuck range	1,5-13 mm
Li-Ion battery capacity	1,5 Ah
Charging time Li Ion	20 min
Weight with Li Ion	1,3 kg

■ = with electronics

Technical data C 15 Li	
Battery voltage	14,4 V
Idling speed, 1st gear/2nd gear	0-450/0-1500 min ⁻¹
Drilling diameter, wood/steel	35/16 mm
Torque adjustment	0,5-8/0,5-6 Nm
Max. torque, wood/steel	25/40 Nm
Chuck range	1,5-13 mm
Li-Ion battery capacity	3,0 Ah
Charging time Li Ion	45 min
Weight with Li Ion	1,6 kg

■ = with electronics

Drilling and screwdriving

Cordless drills T 12+3, T 15+3 and T 18+3

Brains meet brawn.

12 volt, 15 volt, 18 volt – it's time to break with conventional thinking. With the latest T+3 series of cordless drills, which no longer belong to a voltage class but rather to a class that is completely redefined by the interplay of brains and brawn.



Ergonomically perfected.

The light, compact design, the slender Softgrip handle and the perfectly located centre of gravity ensure that work goes easily and smoothly.



As much power as necessary but as little energy as possible.

EC-TEC only generates the exact amount of energy required for the actual application. The motor offers a variable speed range for tasks ranging from the powerful insertion of large screws to drilling at a speed of up to 1500 rpm.



CENTROTEC tool chuck.

The FastFix interface is the key to the CENTROTEC quick-change system and all FastFix adapters. All other types of tools can be used with the standard chuck.



Here everything has been considered.

Capacity display and belt clip are practical details: the hands are kept free for flexible work and with the capacity display the battery charge status can be checked at any time.



Optimum illumination.

The integrated LED light permits precise work even in dark corners.



Scope of delivery	Order no.
FastFix keyless chuck 13 mm	
T 12+3 Li 3,0 Set charger TRC 3, CENTROTEC tool chuck, wood drill bit D4 CENTROTEC, CENTROTEC bit holder, bit PZ 2, FastFix angle attachment, FastFix eccentric attachment, spare battery pack Li-Ion 3.0 Ah, in a SYSTAINER SYS 1 T-LOC	564378
T 12+3 Li 3,0 Plus charger TRC 3, CENTROTEC tool chuck, wood drill bit D4 CENTROTEC, CENTROTEC bit holder, bit PZ 2, spare battery pack Li-Ion 3.0 Ah, in a SYSTAINER SYS 1 T-LOC	564375
T 12+3 Li 3,0/GG battery pack Li-Ion 3.0 Ah, spare battery pack and charger not included, in a carton	564402
T 15+3 Li 3,0 Set charger TRC 3, CENTROTEC tool chuck, wood drill bit D4 CENTROTEC, CENTROTEC bit holder, bit PZ 2, FastFix angle attachment, FastFix eccentric attachment, spare battery pack Li-Ion 3.0 Ah, in a SYSTAINER SYS 1 T-LOC	564386
T 15+3 Li 3,0 Plus charger TRC 3, CENTROTEC tool chuck, wood drill bit D4 CENTROTEC, CENTROTEC bit holder, bit PZ 2, spare battery pack Li-Ion 3.0 Ah, in a SYSTAINER SYS 1 T-LOC	564382
T 15+3 Li 3,0/GG battery pack Li-Ion 3.0 Ah, spare battery pack and charger not included, in a carton	564404
T 18+3 Li 3,0 Set charger TRC 3, CENTROTEC tool chuck, wood drill bit D4 CENTROTEC, CENTROTEC bit holder, bit PZ 2, FastFix angle attachment, FastFix eccentric attachment, spare battery pack Li-Ion 3.0 Ah, in a SYSTAINER SYS 1 T-LOC	564394
T 18+3 Li 3,0 Plus charger TRC 3, CENTROTEC tool chuck, wood drill bit D4 CENTROTEC, CENTROTEC bit holder, bit PZ 2, spare battery pack Li-Ion 3.0 Ah, in a SYSTAINER SYS 1 T-LOC	564390
T 18+3 Li 3,0/GG battery pack Li-Ion 3.0 Ah, spare battery pack and charger not included, in a carton	564406

Accessories see page 23

The T+3 Series – in a class by itself.



Living on the edge.

Applications where you need to drive in screws close to edge pose no problem. With the FastFix eccentric adapter you're able to get to places that are hard to reach even by hand.



Less tiring work.

Light weight in spite of enormous power – you will spend less effort when working overhead and even such a strenuous task will not wear you out.



Full power for drilling large holes.

No matter how big the challenge is, with the T 18+3 you have a real powerhouse in your hands. With its high speed and constantly high motor power it can handle even large bore diameters.



Reliable when used continuously for long periods of time.

In daily heavy-duty construction work, the T+3 series shows what it does best with its powerful EC motor and lithium-ion battery – it continuously provides the highest performance without pause.

Technical data T 12+3

Battery voltage	10,8 V
Idling speed, 1st gear/2nd gear	0-450/0-1500 min ⁻¹
Drilling diameter, wood/steel	25/14 mm
Torque adjustment	0,5-8/0,5-6 Nm
Max. torque, wood/steel	20/34 Nm
Chuck range	1,5-13 mm
Li-Ion battery capacity	3,0 Ah
Charging time Li Ion	45 min
Weight with Li Ion	1,4 kg

■ = with electronics

Technical data T 15+3

Battery voltage	14,4 V
Idling speed, 1st gear/2nd gear	0-450/0-1500 min ⁻¹
Drilling diameter, wood/steel	35/16 mm
Torque adjustment	0,5-8/0,5-6 Nm
Max. torque, wood/steel	27/40 Nm
Chuck range	1,5-13 mm
Li-Ion battery capacity	3,0 Ah
Charging time Li Ion	45 min
Weight with Li Ion	1,5 kg

■ = with electronics

Technical data T 18+3

Battery voltage	18 V
Idling speed, 1st gear/2nd gear	0-450/0-1500 min ⁻¹
Drilling diameter, wood/steel	45/16 mm
Torque adjustment	0,5-8/0,5-6 Nm
Max. torque, wood/steel	30/45 Nm
Chuck range	1,5-13 mm
Li-Ion battery capacity	3,0 Ah
Charging time Li Ion	45 min
Weight with Li Ion	1,7 kg

■ = with electronics

Drilling and screwdriving

TRC 3 and MXC chargers

Emphasis on system benefits.

There are many requirements placed on a charger – it must charge up an empty battery pack as quickly as possible and, at the same time, ensure that the battery does not overheat or is overcharged. This will guarantee the largest possible number of charge cycles possible.

Self-cleaning spring contacts.

Battery pack slot with self-cleaning spring contacts for maximum reliability and a long battery pack service life.

Simple wall mount.

Retainer on the back for mounting the charger on the wall.



Good ventilation.

Labyrinth slits ensure good ventilation and at the same time prevent foreign objects from entering the charger and causing faults.

Easy to wind up.

Ribbed surface for winding up the connecting cable quickly.

Charging progress indicator.

Display field with LEDs gives a current indication of the charging state, charging process and possible faults.

Working with Festool means having the advantages that are available when working with complete tool systems. This also holds true for the charging stations. Battery packs are charged using controlled impulses that interrupt the charging process again and again for periods of milliseconds. The charging time, battery temperature and the current state of charge are continuously monitored and the charging current is adjusted as needed. In this way, the high performance of the battery packs, as well as a large number of charge cycles, are ensured. Along with the monitoring function of the tool during operation, a safety concept is produced that, for the first time, permits us to offer a three-year warranty on all the components: the cordless drill, charger and battery pack.

	Li-Ion					NiCd/NiMH	
	1,5 Ah	10,8 V 3,0 Ah	1,5 Ah	14,4 V 3,0 Ah	18 V 3,0 Ah	12 V 1,3 2,0	15,6 V 2,4 3,0 Ah
T 12+3		●	●			●	
T 15+3		●	●	●		●	●
T 18+3				●	●		●
C 12 Li-Ion		●	●			●	
C 15 Li-Ion		●	●	●		●	●
CXS	●						
TRC 3		●	●	●	●	●	●
LC 45						●	●
MXC	●						

Highest flexibility and economy: battery packs in same voltage class can be used

Scope of delivery

in a carton

Order no.

Rapid charger TRC 3


for all Festool NiCd, NiMH and Li-ion battery packs, for Festool cordless drills C 12, TDK 12, T 12+3, C 15, TDK 15.6, T 15+3 and T 18+3

494676

Rapid charger MXC

for Festool battery pack BP-XS, for Festool cordless drill CXS

497495

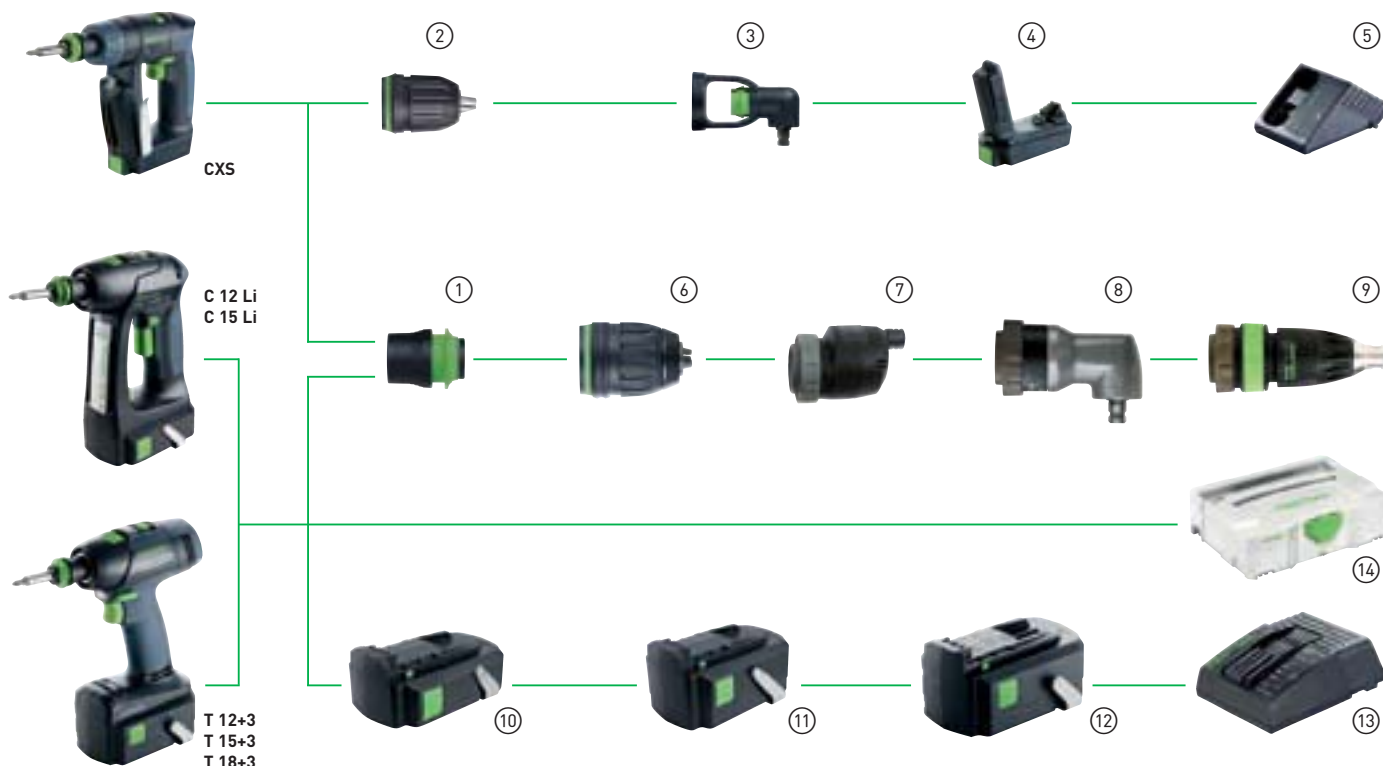

Accessories for cordless drills CXS, C 12 Li, C 15 Li, T 12+3, T 15+3 and T 18+3

Product	Explanation	Order no.
① Tool chuck WH-CE CENTROTEC	for all Festool cordless drills with FastFix interface, in self-service display pack	492135
② Drill chuck BF-FX 8 FastFix	for all Festool cordless drills with FastFix interface, in self-service display pack	497216
③ Angle attachment XS-AS	for CXS	497951
④ Battery pack BP-XS	replacement battery for cordless drill CXS, lithium ion (Li-Ion), Voltage 10,8 V, Capacity 1,5 Ah, weight 200 g, in self-service display pack	497519
⑤ Rapid charger MXC	for Festool battery pack BP-XS, for Festool cordless drill CXS, in a carton	497495
⑥ Keyless chuck BF-FX 10 FastFix	for all Festool cordless drills with FastFix interface, Clamping range 1-10 mm, in self-service display pack	491350
Keyless chuck BF-FX 13 FastFix	for all Festool cordless drills with FastFix interface, Clamping range 1,5-13 mm, in self-service display pack	490698
⑦ FastFix eccentric attachment DD-ES	for all Festool cordless drills with FastFix interfaces, except CXS, in self-service display pack	490294
⑧ FastFix angle attachment DD-AS	for all Festool cordless drills with FastFix interfaces, except CXS, in self-service display pack	490293
⑨ Depth stop FastFix DD-DC	for all Festool cordless drills with FastFix interfaces, except CXS, in self-service display pack	493539
⑩ Battery pack BPC 12 Li 3,0 Ah	replacement battery for cordless drills T 12+3 and C 12 Li, lithium ion (Li-Ion), Voltage 10,8 V, Capacity 3,0 Ah, weight 490 g, in self-service display pack	498338
Battery pack BPC 12 Li 1,5 Ah	replacement battery for cordless drills T 12+3 and C 12 Li, lithium ion (Li-Ion), Voltage 10,8 V, Capacity 1,5 Ah, weight 310 g, in self-service display pack	498336
⑪ Battery pack BPC 15 Li 3,0 Ah	replacement battery for cordless drills T 15+3, C 15 Li and PSC/PSBC 400, lithium ion (Li-Ion), Voltage 14,4 V, Capacity 3,0 Ah, weight 580 g, in self-service display pack	498340
⑫ Battery pack BPC 18 Li 3,0 Ah	replacement battery for cordless drills T 18+3 and PSC/PSBC 400, lithium ion (Li-Ion), Voltage 18 V, Capacity 3,0 Ah, weight 680 g, in self-service display pack	498342
⑬ Rapid charger TRC 3	for all Festool NiCd, NiMH and Li-ion battery packs, for Festool cordless drills C 12, TDK 12, T 12+3, C 15, TDK 15.6, T 15+3 and T 18+3, in a carton	494676
⑭ Empty SYSTAINER	see "SYSTAINER, SORTAINER and Systainer-Port", from page 337	

Drilling and screwdriving

Drill bits and accessories

A revolutionary system – CENTROTEC and FastFix.



Unbelievably versatile.









Fitted without tools and rapidly changed: the FastFix attachments thus turn a Festool cordless drill into a right angle screwdriver, eccentric screwdriver or depth limiting screwdriver.

The CENTROTEC system.

50% shorter and 80% lighter than standard drill chucks, the CENTROTEC tool chuck is the key to the CENTROTEC tool system and a further module in the FastFix system giving true-running precision that is ten times more accurate.

Easy to change.

The CENTROTEC chuck can be fitted to all Festool cordless drills with a FastFix interface. You can change rapidly between screwdriver bit and drill bit and vice versa with a single hand movement. CENTROTEC tools are also compatible with standard chucks.

	Model	Order no.
CENTROTEC tool range		
	Assembly package CENTROTEC-DRIVE screwdriver handle, WH-CE CENTROTEC tool chuck, magnetic bit holder BH-60 CE, extra-long CENTROTEC magnetic bit holder BV 150 CE, CENTROTEC drill adapter BA-CE, deburring countersink QLS D2-8 CE, deburring countersink QLS D5-15 CE, drill bit with depth stop BTA HW D5 CE, drill countersink with depth stop, BSTA HS D3.5 CE, centering bit ZB HS D5 EURO CE, hook driver HD D18 CE, twinBOX Mix, drill bit case HSS D3-10 CE/10, drill bit case BKS D3-8 CE/W-K, 12x long CENTROTEC bits PZ/PH/TX, bit assortment 25 mm, 50 pieces, in a SYSTAINER SYS 1 T-LOC	SYS 1 CE-SORT 497628
	Ratchet set 1/4" socket set from 4 to 13 mm, 19 different bit inserts and 2 bit extensions, ratchet and CENTROTEC handle plus various adapters and extensions	1/4"-CE RA-Set 37 497881
	Bit box content 10 pieces 3x PZ1, 4x PZ2, 3x PZ3 TX 10, 2x TX 15, 3x TX 20, 3x TX 25, TX 30 PH1, PH2, PZ1, PZ2, PZ3, TX15, TX20, TX25, TX 30, SZ 0,8x5,5	BB-PZ 496934 BB-TX 496935 BB-MIX 496936
	CENTROTEC screwdriver handle	CENTROTEC-DRIVE 495228
	Adapter for plug-in bits with ball lock for manual operation, Tool reception 1/4", Length 50 mm with pin lock for machine operation, Tool reception 1/4", Length 50 mm with ball lock for manual operation, Tool reception 3/8", Length 70 mm with pin lock for machine operation, Tool reception 3/8", Length 70 mm	1/4"-50 CE/KG CENTROTEC 495131 1/4"-50 CE/ST CENTROTEC 495132 3/8"-70 CE/KG CENTROTEC 495133 3/8"-70 CE/ST CENTROTEC 495134
	Bit holder qty. in pack 1 piece(s)	BHS 65 CE 492648
	Bit holder qty. in pack 1 piece(s)	BH 60 CE 492539
	CENTROTEC extra long bit holder qty. in pack 1 piece(s)	BV 150 CE 492540

Model

Order no.








CENTROTEC tool range: Bits

	Bit Pozidriv Length 25 mm		
	Size PZ 1, qty. in pack 3 piece(s)	HiQ PZ 1-25 /3	490471
	Size PZ 2, qty. in pack 3 piece(s)	HiQ PZ 2-25 /3	490472
	Size PZ 3, qty. in pack 3 piece(s)	HiQ PZ 3-25 /3	490473
	Size PZ 1, qty. in pack 10 piece(s)	PZ 1-25 /10	490481
	Size PZ 2, qty. in pack 10 piece(s)	PZ 2-25 /10	490482
	Size PZ 3, qty. in pack 10 piece(s)	PZ 3-25 /10	490483
	Bit Phillips Length 25 mm		
	Size PH 1, qty. in pack 3 piece(s)	HiQ PH 1-25 /3	490491
	Size PH 2, qty. in pack 3 piece(s)	HiQ PH 2-25 /3	490492
	Size PH 3, qty. in pack 3 piece(s)	HiQ PH 3-25 /3	490493
	Size PH 1, qty. in pack 10 piece(s)	PH 1-25 /10	490501
	Size PH 2, qty. in pack 10 piece(s)	PH 2-25 /10	490502
	Size PH 3, qty. in pack 10 piece(s)	PH 3-25 /10	490503
	Slot bit Length 25 mm, qty. in pack 10 piece(s)		
	Size SZ 0,6 x 4,5	SZ 0,6x4,5-25/10	493309
	Size SZ 0,8 x 5,5	SZ 0,8x5,5-25/10	493310
	Size SZ 1,2 x 6,5	SZ 1,2x6,5-25/10	493311
	Bit Torx Length 25 mm		
	Size TX 10, qty. in pack 3 piece(s)	HiQ TX 10-25 /3	490494
	Size TX 15, qty. in pack 3 piece(s)	HiQ TX 15-25 /3	490495
	Size TX 20, qty. in pack 3 piece(s)	HiQ TX 20-25 /3	490496
	Size TX 25, qty. in pack 3 piece(s)	HiQ TX 25-25 /3	490497
	Size TX 30, qty. in pack 3 piece(s)	HiQ TX 30-25 /3	490498
	Size TX 40, qty. in pack 3 piece(s)	HiQ TX 40-25 /3	490499
	Size TX 10, qty. in pack 10 piece(s)	TX 10-25 /10	490504
	Size TX 15, qty. in pack 10 piece(s)	TX 15-25 /10	490505
	Size TX 20, qty. in pack 10 piece(s)	TX 20-25 /10	490506
	Bit Pozidriv Length 100 mm, qty. in pack 2 piece(s)		
	Size PZ 1	HiQ PZ 1-100 CE/2	492527
	Size PZ 2	HiQ PZ 2-100 CE/2	492528
	Size PZ 3	HiQ PZ 3-100 CE/2	492529
		Bit Phillips Length 100 mm, qty. in pack 2 piece(s)	
Size PH 1		HiQ PH 1-100 CE/2	492530
Size PH 2		HiQ PH 2-100 CE/2	492531
Size PH 3		HiQ PH 3-100 CE/2	492532
	Bit Torx Length 100 mm, qty. in pack 2 piece(s)		
	Size TX 15	HiQ TX 15-100 CE/2	492533
	Size TX 20	HiQ TX 20-100 CE/2	492534
	Size TX 25	HiQ TX 25-100 CE/2	492535
	Bit slot head HiQ Length 100 mm, qty. in pack 2 piece(s)		
	Size SZ 0,8X5,5	SZ 0,8X5,5-100 CE/2	492537
	Size SZ 1,2X6,5	SZ 1,2X6,5-100 CE/2	492538

HiQ = bits with zirconium duplex coating for better grip on the screwhead and longer service life.

Drilling and screwdriving

Screwdriver and drill bits

		Model	Order no.
Standard drill bit programme			
	Twist drill bit allen key, qty. in pack 1 piece(s)		
	complete drill bit with bit holder and 2 replacement drill bits	HSS D 3 /33 CE/M-Set	493421
	complete drill bit with bit holder and 2 replacement drill bits	HSS D 3,5/39 CE/M-Set	493422
	complete drill bit with bit holder and 2 replacement drill bits	HSS D 4 /43 CE/M-Set	493423
	complete drill bit with bit holder and 2 replacement drill bits	HSS D 4,5/47 CE/M-Set	493424
	complete drill bit with bit holder and 2 replacement drill bits	HSS D 5 /52 CE/M-Set	493425
	complete drill bit with bit holder and 2 replacement drill bits	HSS D 5,5/57 CE/M-Set	493426
	complete drill bit with bit holder and 2 replacement drill bits	HSS D 6 /57 CE/M-Set	493427
	complete drill bit with bit holder and 2 replacement drill bits	HSS D 6,5/63 CE/M-Set	493428
	complete drill bit with bit holder and 1 replacement drill bit	HSS D 8,0/75 CE/M-Set	495308
	complete drill bit with bit holder and 1 replacement drill bit	HSS D 10,0/75 CE/M-Set	495309
	Drill bit case Diameter 3-10 mm, qty. in pack 10 piece(s)	HSS D3-10 CE/10	495128
	Twist drill bit qty. in pack 10 piece(s)	HSS D 3/33 M/10x	493437
	qty. in pack 10 piece(s)	HSS D 3,5/39 M/10x	493438
	qty. in pack 10 piece(s)	HSS D 4/43 M/10x	493439
	qty. in pack 10 piece(s)	HSS D 4,5/47 M/10x	493440
	qty. in pack 10 piece(s)	HSS D 5/52 M/10x	493441
	qty. in pack 10 piece(s)	HSS D 5,5/57 M/10x	493442
	qty. in pack 10 piece(s)	HSS D 6/57 M/10x	493443
	qty. in pack 10 piece(s)	HSS D 6,5/63 M/10x	493444
	qty. in pack 5 piece(s)	HSS D 8,0/75 M/5x	495310
	qty. in pack 5 piece(s)	HSS D 10,0/75 M/5x	495311
	Twist drill bit case Diameter 1-10 mm, qty. in pack 10 piece(s)	SBKS-HSS D 1-10	492560
	Drill bit Diameter 3 mm, qty. in pack 1 piece(s)	D 3 CE/W	492512
	Diameter 4 mm, qty. in pack 1 piece(s)	D 4 CE/W	492513
	Diameter 5 mm, qty. in pack 1 piece(s)	D 5 CE/W	492514
	Diameter 6 mm, qty. in pack 1 piece(s)	D 6 CE/W	492515
	Diameter 7 mm, qty. in pack 1 piece(s)	D 7 CE/W	492516
	Diameter 8 mm, qty. in pack 1 piece(s)	D 8 CE/W	492517
	Diameter 10 mm, qty. in pack 1 piece(s)	D 10 CE/W	492518
	Diameter 3-8 mm, qty. in pack 5 piece(s)	BKS D 3-8 CE/W	493648
	Diameter 3-8 mm, qty. in pack 5 piece(s)	BKS D 3-8 CE/W-K	495130

		Model	Order no.
CENTROTEC tool range			
	Forstner drill bit		
	Diameter 15 mm, qty. in pack 1 piece(s)	D 15 CE	496472
	Diameter 20 mm, qty. in pack 1 piece(s)	D 20 CE	496473
	Diameter 25 mm, qty. in pack 1 piece(s)	D 25 CE	496474
	Diameter 30 mm, qty. in pack 1 piece(s)	D 30 CE	496475
	Diameter 35 mm, qty. in pack 1 piece(s)	D 35 CE	496476
	5 drill bits D 15-35, Diameter 15-35 mm, qty. in pack 1 piece(s)	CE Set D 15-35	496390
	centre point and centring bit, for CENTROTEC Forstner drill bit	FB-CE	497268
	Deburring countersink qty. in pack 1 piece(s)		
	Diameter 2-8 mm	QLS D2- 8 CE	492520
	Diameter 5-15 mm	QLS D5-15 CE	492521
	Drill bit with depth stop carbide, adjustable depth stop, Diameter 5 mm, qty. in pack 1 piece(s)	BTA HW D5 CE	492522
	Spare part drill bit for drill bit with depth stop, carbide, Diameter 5 mm, qty. in pack 1 piece(s)	HW D5 F.BTA	491794
	Drill countersink with depth stop adjustable depth stop, Diameter 3,5 mm, qty. in pack 1 piece(s)	BSTA HS D3,5 CE	492523
	Spare part drill bit for drill countersink with depth stop, Diameter 3,5 mm, qty. in pack 5 piece(s)	EB-BSTA D 3,5/5x	494445
	Spare part countersink for drill countersink with depth stop, Diameter 13 mm, qty. in pack 1 piece(s)	HS D13/3,5 F.BSTA	491796
	Drill countersink with depth stop adjustable depth stop, Diameter 4,5 mm, qty. in pack 1 piece(s)	BSTA HS D4,5 CE	492524
	Spare part drill bit for drill countersink with depth stop, Diameter 4,5 mm, qty. in pack 5 piece(s)	EB-BSTA D 4,5/5x	494446
	Spare part countersink Diameter 13 mm, qty. in pack 1 piece(s)	HS D13/4,5 F.BSTA	494815
	Countersink drill bit w/ depth stop adjustable depth stop, Diameter 5 mm, qty. in pack 1 piece(s)	BSTA HS D5 CE	496451
	Drill bit for BSTA Diameter 5 mm, qty. in pack 5 piece(s)	EB-BSTA D5/5x	496452
	Spare part countersink Diameter 13 mm, qty. in pack 1 piece(s)	HS D 13/5 BSTA	496453
	Depth stop spare sleeves for drill bits/countersinks with depth stop, qty. in pack 5 piece(s)	BTA/BSTA 5x	495882
	Centering bit with depth stop for 5 mm Euro-screws, Diameter 5 mm, qty. in pack 1 piece(s)	ZB HS D5 EURO CE	492525
	Spare part drill bit Diameter 5 mm, qty. in pack 1 piece(s)	HS D5	493572
	Hook driver Diameter 18 mm, qty. in pack 1 piece(s)	HD D18 CE	492526
	Drill adapter qty. in pack 1 piece(s)	BA-CE CENTROTEC	496450

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17